


QUARTZLINE DECO D30

Version 1.0 – October 2026

DECO D30 is a soft, flexible and elastic polyurethane resin floor for indoor use. The resilient floor is comfortable underfoot and can be laid on an optional cushioning underlayer. Finish it in a solid colour, with flakes or as a concrete look.

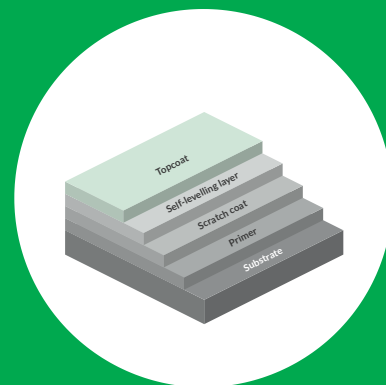

DECO D30: PRODUCT OPTIONS PER LAYER

Product	Description	Consumption
LAYER 1: Primer		
Primer BHH	Epoxy primer for porous substrates	150–300 g/m ²
Primer GW	Epoxy primer for closed substrates	100–150 g/m ²
LAYER 2: Scratch coat		
SL-EP Scratchcoat	Epoxy scratch coat for pore filling and levelling	500–1,500 g/m ²
SL-PU Scratchcoat	PU scratch coat when epoxy is not wanted	1,000–1,500 g/m ²
LAYER 3: Self-levelling layer		
SL-PU D30	Soft, flexible-elastic PU resin floor	1,450 g/m ² per mm
LAYER 4: Topcoat		
Coating PU SG Coloured	Coloured, UV-resistant topcoat	125–150 g/m ²
Coating PU SG NF Matt	Transparent topcoat for a matt finish	125–150 g/m ²
Coating PU SG NF Satin Gloss	Transparent topcoat for a satin finish	125–150 g/m ²
<i>SL-PU D30 discolours under UV light. For a solid colour choose Coating PU SG Coloured; for flakes or a concrete look, a transparent topcoat. A 2nd topcoat gives extra protection against chemicals and wear.</i>		
OPTIONAL: 2nd topcoat		
Coating PU SG NF Matt	Transparent topcoat for a matt finish	125–150 g/m ²
Coating PU SG NF Satin Gloss	Transparent topcoat for a satin finish	125–150 g/m ²

PROPERTIES

- Soft, flexible and elastic
- Cushioning underlayer possible
- Liquid-tight
- Solid colour, flakes or concrete look
- Seamless

COLOURS

RAL
NCS
Sikkens
Quartzline Uni Colour
Quartzline Mixed Colour

APPLICATIONS

Education
Healthcare
Retail
Culture and leisure