

QUARTZLINE PROTECT COATING EPG


Version 1.0 – October 2026

PROTECT Coating EPG is a pigmented epoxy coating system with a high-gloss finish. In one or two coats, an old floor becomes a functional, strong floor that resists chemicals and scratches. Optionally finished with a matt or satin PU topcoat.



PROTECT COATING EPG: PRODUCT OPTIONS PER LAYER

Product	Description	Consumption
LAYER 1: Primer		
 Primer BHH	Epoxy primer for porous substrates	150–300 g/m ²
 Primer GW	Epoxy primer for closed substrates	100–150 g/m ²
LAYER 2: Coating layer		
 Coating EPG	High-gloss epoxy roller coating	200–500 g/m ²
OPTIONAL: 2nd coating layer		
 Coating EPG	Second coat for extra coverage	200–500 g/m ²
OPTIONAL: Topcoat		
 Coating PU MG Matt	Topcoat for a matt finish	125–150 g/m ²
 Coating PU MG Satin Gloss	Topcoat for a satin finish	125–150 g/m ²

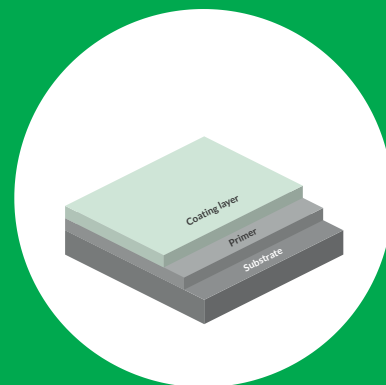

PROPERTIES

-  Scratch-resistant
-  Good chemical resistance
-  Liquid-tight
-  Easy to clean
-  High-gloss finish

COLOURS

RAL
NCS
Sikkens
Quartzline Uni Colour

APPLICATIONS

Automotive
Logistics
Production areas
Industry