


QUARTZLINE PROTECT EUROPARK EPOXY

Version 1.0 – October 2026

PROTECT Europark is a slip-resistant (R11) epoxy floor system for car parks and parking decks. Depending on the application it is finished with polyaspartic or MMA. The system withstands heavy loads, car tyres and chemicals, is waterproof and easy to clean.

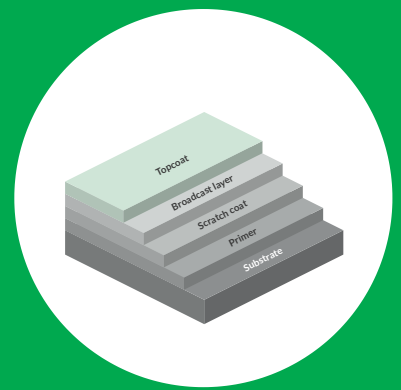

PROTECT EUROPARK EPOXY: PRODUCT OPTIONS PER LAYER		
Product	Description	Consumption
LAYER 1: Primer		
 Primer BHH	Epoxy primer for porous substrates	150–300 g/m ²
<i>On a closed substrate you can sometimes start directly with the scratch coat.</i>		
LAYER 2: Scratch coat		
 SL-EP Scratchcoat	Epoxy scratch coat for pore filling and levelling	500–1,500 g/m ²
LAYER 3: Broadcast layer		
 Mortar 0.4-0.8 mm	Quartz for a slip-resistant surface	1.3–1.5 kg/m ²
LAYER 4: Topcoat		
 Coating Polyaspartic Coloured	Polyaspartic topcoat, low odour	600–900 g/m ²
 Plex 1690 Coloured	Coloured MMA topcoat	600–900 g/m ²
<i>Choose Coating Polyaspartic Coloured where odour could be a problem, and Plex 1690 Coloured (MMA) where it is not.</i>		

PROPERTIES

-  Slip-resistant (R11)
-  Suitable for heavy loads
-  Resistant to car tyres
-  Waterproof
-  Easy to clean

COLOURS

RAL
NCS
Sikkens

APPLICATIONS

Top deck
Intermediate deck
Basement