



# QUARTZLINE STONE INDOOR

Version 1.0 – October 2026

STONE Indoor is a robust, seamless floor that is easy to maintain. The floor is durable, wear-resistant and can be applied in all possible colour combinations. STONE Indoor is available with an open or closed structure. For a closed structure, a coat of Topper 12 is applied, which makes the floor easier to clean.



| STONE INDOOR: PRODUCT OPTIONS PER LAYER                                                              |                                                      |                                                                                                          |  |
|------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--|
| Product                                                                                              | Description                                          | Consumption                                                                                              |  |
| <b>LAYER 1: Primer</b>                                                                               |                                                      |                                                                                                          |  |
|  Primer BHH         | Standard epoxy primer for pore filling and levelling | 150–300 g/m <sup>2</sup>                                                                                 |  |
|  Primer GW          | Epoxy primer for difficult-to-bond substrates        | 100–150 g/m <sup>2</sup>                                                                                 |  |
|  Primer Universal   | Acrylate primer for porous substrates                | 150–500 g/m <sup>2</sup>                                                                                 |  |
| <b>LAYER 2: Aggregate layer with binder</b>                                                          |                                                      |                                                                                                          |  |
|  Siergrind 1-2 mm | UV-resistant coloured quartz                         | 11 kg/m <sup>2</sup>                                                                                     |  |
|  Siergrind 2-3 mm | UV-resistant coloured quartz                         | 13 kg/m <sup>2</sup>                                                                                     |  |
|  Siergrind 3-4 mm | UV-resistant coloured quartz                         | 16 kg/m <sup>2</sup>                                                                                     |  |
|  Binder TP E30    | Two-component epoxy binder                           | 8% of quartz weight                                                                                      |  |
| <b>OPTIONAL: Sealer</b>                                                                              |                                                      |                                                                                                          |  |
|  Topper 12        | Sealer for a closed structure                        | 1-2 mm: 500–600 g/m <sup>2</sup><br>2-3 mm: 700–800 g/m <sup>2</sup><br>3-4 mm: 800–900 g/m <sup>2</sup> |  |

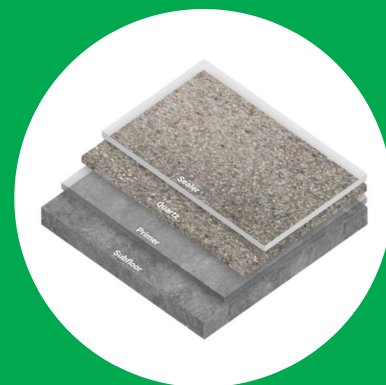

## PROPERTIES

-  Long service life
-  Easy to maintain
-  Wear-resistant
-  Many combinations possible
-  Seamless

## COLOURS

- Quartz
- Quartz Metallic

## APPLICATIONS

- Residences
- Retail
- Offices
- Automotive
- Hospitality