


QUARTZLINE DECO CORQUES LIQUID LINO

Version 1.0 – October 2026

Corques Liquid Lino is a poured, seamless floor with permanently resilient properties and a natural look. It consists mainly of natural raw materials such as vegetable oil, linseed oil, wood and cork powder. At a layer thickness of approx. 2 mm the floor conducts heat well, which benefits the efficiency of underfloor heating.

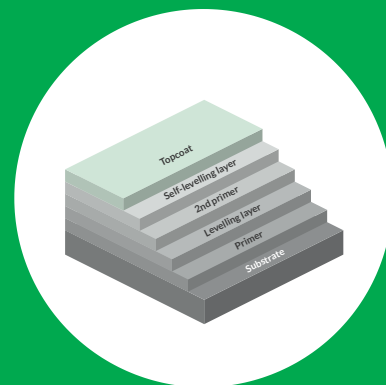

DECO CORQUES LIQUID LINO: PRODUCT OPTIONS PER LAYER

Product	Description	Consumption	
LAYER 1: Primer			
	Primer Universel	Acrylate primer for porous substrates	150–500 g/m²
LAYER 2: Levelling layer			
	Cementitious SL 2-20 NF	Cement-based levelling compound	1.6 kg/m² per mm
	Alpha SL 2-20	Gypsum-based levelling compound	1.6 kg/m² per mm
LAYER 3: 2nd primer			
	Primer Universel	Acrylate primer for porous substrates	150–500 g/m²
	Primer PU BHH	PU primer when epoxy is not wanted	125–150 g/m²
	Use Primer Universel for rooms up to 10 m², so the next layer can be applied the same day.		
LAYER 4: Self-levelling layer			
	Corques Liquid Lino	Poured floor made from natural raw materials	approx. 2.2 kg/m²
LAYER 5: Topcoat			
	Coating PU SG NF Matt	Transparent topcoat for a matt finish	125–150 g/m²

PROPERTIES

-  Permanently resilient
-  Natural raw materials
-  Good thermal conductivity
-  Wear-resistant
-  Seamless, no welded seams

COLOURS

Corques Liquid Lino colours

APPLICATIONS

Public areas
Corridors
Hotels
Offices