


QUARTZLINE MORTAR TROWEL

Version 1.0 – October 2026

MORTAR Trowel is a trowelled mortar floor that withstands heavy loads and meets strict hygiene requirements. The floor connects well to drainage channels and gullies and can be finished seamlessly to the wall with a coved skirting. Ideally suited to wet areas.



MORTAR TROWEL: PRODUCT OPTIONS PER LAYER			
Product	Description	Consumption	
LAYER 1: Primer			
 Primer GW	Epoxy primer for closed substrates	100–150 g/m ²	
 Primer BHH	Epoxy primer for porous substrates	150–300 g/m ²	
LAYER 2: Mortar layer with binder			
 Mortar 0.4-1.4 mm	Coloured quartz	approx. 10 kg/m ²	
 Binder TP E27	Two-component epoxy binder	10–14% of mortar weight	
LAYER 3: Sealer			
 Topcoat E	Epoxy sealing compound, first coat	275–325 g/m ²	
LAYER 4: 2nd sealer			
 Topcoat E	Epoxy sealing compound, second coat	125–175 g/m ²	
OPTIONAL: Topcoat			
 Coating PU MG Matt	Topcoat for a matt finish	125–150 g/m ²	
 Coating PU MG Satin Gloss	Topcoat for a satin finish	125–150 g/m ²	

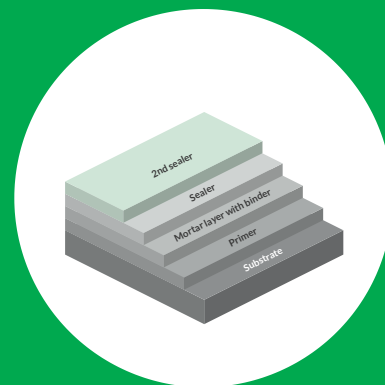

PROPERTIES

-  Suitable for heavy loads
-  Hygienic
-  Liquid-tight
-  Coved skirting possible
-  Many designs possible

LAYER THICKNESS

5–10 mm

COLOURS

Mortar
Mortar Mix colours
Mortar specials

APPLICATIONS

Hospitality
Healthcare
Agriculture